

Video intercom system


External unit (available in 2-wire or IP version)

General features:

- Bus 2-wire or IP video door phone
- 2MP HD wide angle camera with infrared night vision
- Two-way audio with built-in speaker and microphone
- Remote monitoring and door unlocking via internal monitor and App or PC software
- 2-wire version -> TCP/IP connection via 2-wire/IP converter
- IP version -> TCP/IP connection and can be powered with standard PoE
- Degree of protection IP65

Technical specifications:

| | |
|-----------------------------------|---|
| Optics | 2MP HD Wide angle Low illumination IR |
| Image functions | WDR / DNR / BLC |
| Viewing angle | Horizontal 180° - Vertical 96° |
| Audio | Two-way audio with microphone and speaker |
| Keyboard | Mechanical call bitton |
| Output (2-wire) | 2 relay output / An external power source is required |
| Output (IP) | 2 relay output / 12V max 1A |
| Input | 4 Input |
| Remote access | Via smartphone App or PC Software |
| Network interface (2-wire) | Connessione rete tramite 2fili / SIP 2.0 Protocol |
| Network interface (IP) | Ethernet 10/100 BaseT / SIP 2.0 Protocol |
| Power supply (2 wire) | DC 24 V with 2 wire Hub / 12 Vdc 1700 mA max |
| Power supply (IP) | PoE (IEEE 802.3af) / 12 Vdc 850 mA max |
| Degree of protection | IP65 |
| Operating temperature | -40° C ~ +60° C |

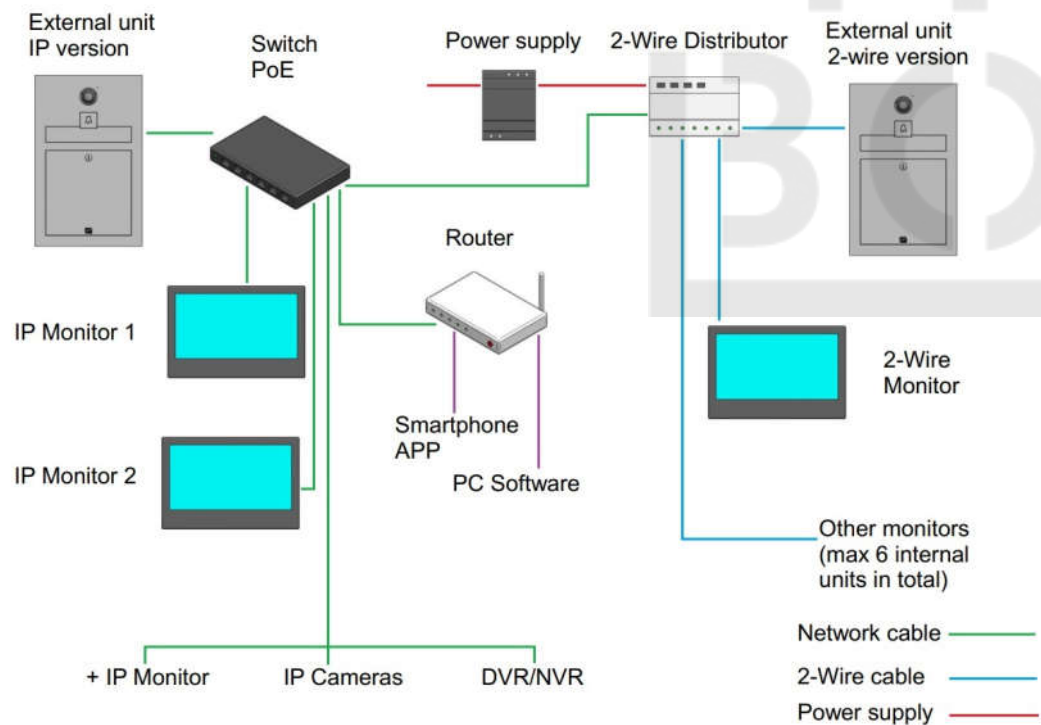

Technical specifications

Video intercom system (external unit)

DESIGN EXCLUSIVELY OWNED BY MARINOX SRL, WHICH RESERVES ALL LEGAL RIGHTS